
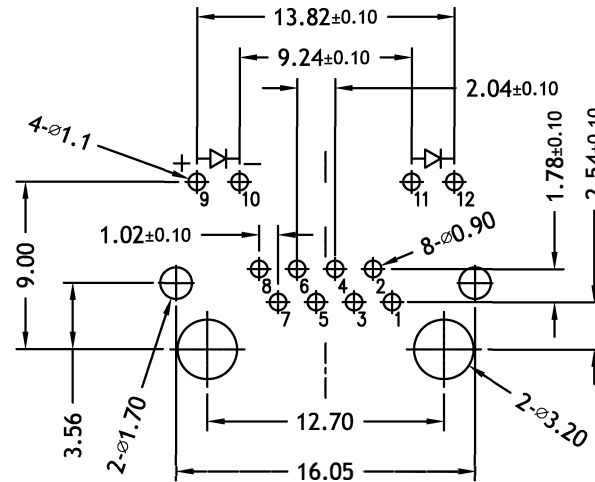
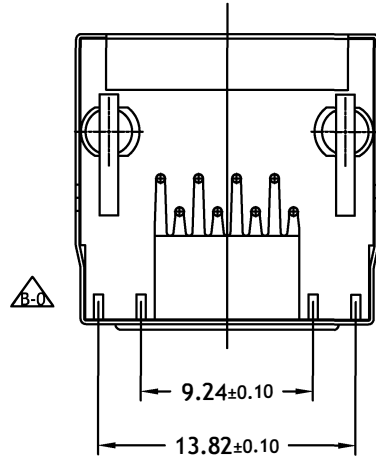
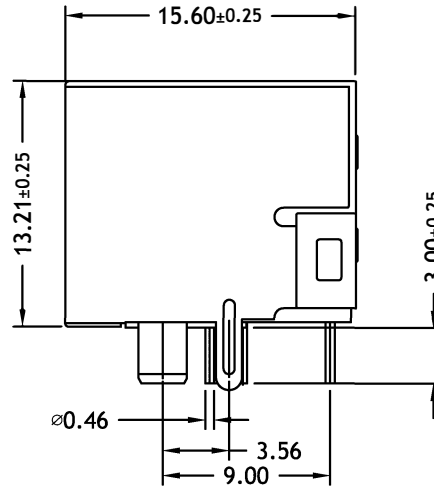


RoHS COMPLIANT

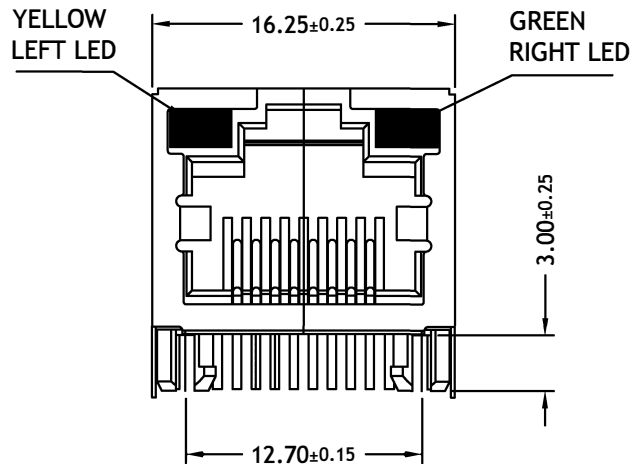

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

SPECIFICATION


- 1.Current Rating:1.5A AMP
- 2.Voltage Rating:125V VAC
- 3.Contact resistance≤20mΩ Max.
- 4.Insulation resistance:100MΩ Min (DC 500V).
- 5.Withstanding voltage:1000V AC / 60 Hz/mins'

ELECTRONICS:

- 1.Housing Material: PA66 UL94V-0.
- 2.Terminal Material: Phosphorous Bronze Ø0.46mm
- 3.Shield: Brass
4. Terminal Plating: SEE Part number Information
- 5.Shield Plating: Tin Plating
6. Durability: 750 cycles Min.
7. Mating/Unmating Force: 30N Max
8. Retention Strength: 50N for 60S±5S

ENVIRONMENTAL:

1. Storage Temperature :-40°C~+85°C Relative Humidity<80%
2. Operation Temperature:-40°C~+85°C

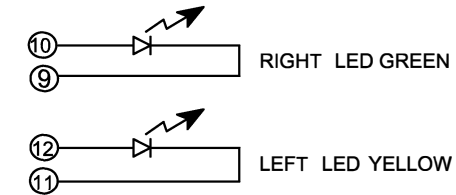

Part number Information:

RJ45-00192-XX S

Terminal Plating _____
GF: Gold Flash Plating on Mating Area
03:3u" Gold Plating on Mating Area
06:6u" Gold Plating on Mating Area
15:15u" Gold Plating on Mating Area
30: 30u" Gold Plating on Mating Area

Series _____

Blank: W/O LED
1: LED1 GREEN LED2 YELLOW
2: LED1 YELLOW LED2 GREEN

						Angle	±2°	DESIGN					Satron Electronics Ltd.	
						10<L≤20	±0.3	CHECK						
	B-0		Add one side view			5<L≤10	±0.25	APPROVAL					TITLE:	RJ45 1PORT w/LED Tab-Up
	A-0		New			L≤5	±0.20						MODEL NO.	RJ45-00192-XX S
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4		SHEET: 1 of 1	FILE NO.	