

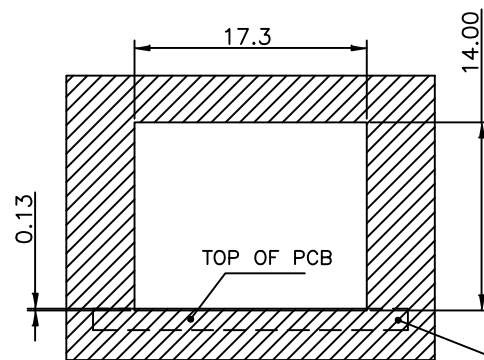

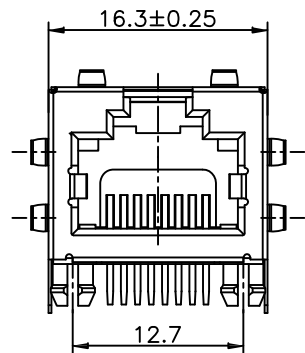


RoHS COMPLIANT

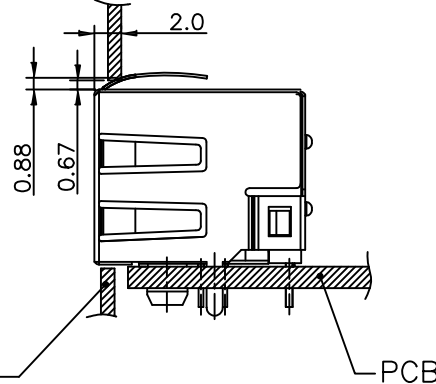

SUGGESTED PANEL CUTOUT DIM

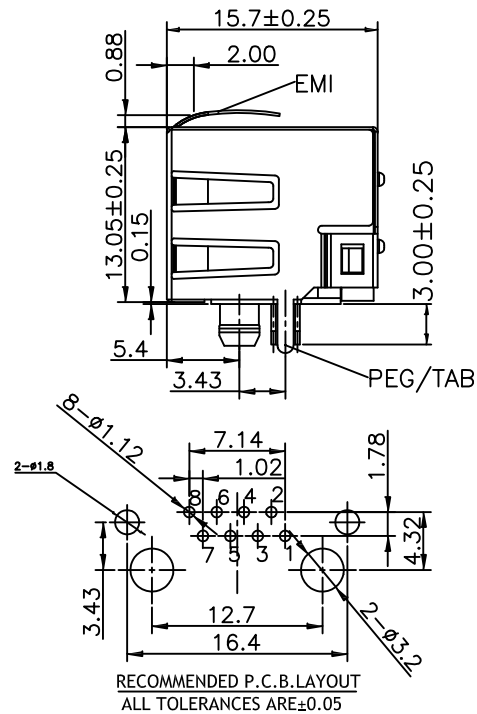

METAL PANEL

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC WITHSTANDING RESISTANCE : 1000 V AC RMS 50Hz, 1MIN.

MATERIAL:

1. HOUSING MATERIAL : PA46 BLACK UL94V-0.
2. TERMINAL MATERIAL : PHOSPHOR BRONZE T=0.35MM(C5191)
3. TERMINAL PLATING : SEE PART NUMBER INFORMATION
4. SHIELD: COPPER ALLOY PLATING NI
5. DURABILITY: 750 CYCLES MIN.
5. LED: OPTION

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
2. OPERATION : -40°C TO +85°C.

Part number Information:

RJ45-00196-XX

Terminal Plating

GF: Gold Flash Plating on Mating Area
03:3u" Gold Plating on Mating Area
06:6u" Gold Plating on Mating Area
15:15u" Gold Plating on Mating Area
30:30u" Gold Plating on Mating Area

						Angle	±2°	DESIGN				Satron Electronics Ltd.	
						X.X	±0.20	CHECK					
						X.XX	±0.15					TITLE:	RJ45 1PORT w/LED Tab-Up
						X.XXX	±0.075	APPROVAL				MODEL NO.	RJ45-00196-XX
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	FILE NO.	