


Quectel BG950S-GL

Ultra-compact LTE Cat M1/ NB2 Module

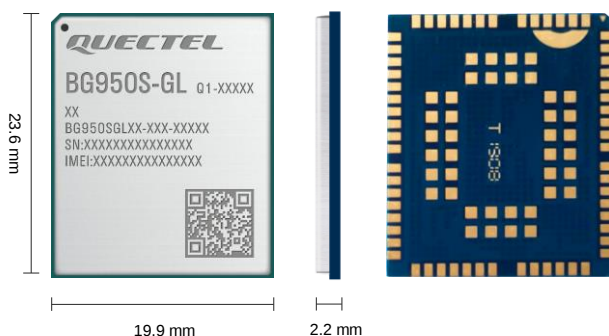

BG950S-GL, a 5G-ready ultra-compact LPWA module, is compliant with 3GPP Release 14, which is to support 3GPP Release 15–17 easily by software upgrade. The module supports LTE Cat M1/ NB2 bands, SRD* (Short Range Device) communication in Sub-1 GHz and 2.4 GHz bands, and integrated SIM (iSIM*). Besides, it features ultra-low power consumption implemented by Altair ALT1350 processor and integrated RAM and flash, which help reduce the current consumption to rather low levels in various modes, including PSM, eDRX, etc. It is further integrated with a GNSS engine that supports GPS and GLONASS* satellite systems.

BG950S-GL is an industrial-grade module for industrial and commercial applications only.

With an ultra-compact SMT form factor of 23.6 mm × 19.9 mm × 2.2 mm and a high integration level, the module enables integrators and developers to design applications easily leveraging its low power consumption and compact structure design. The BG950S-GL's advanced LGA package allows for fully automated manufacturing necessary for large-scale applications.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities extend the applicability of the module to a wide range of M2M applications, such as wireless POS, smart metering, tracking, wearable devices, and many more.



Key Features


- ✓ Extremely compact LTE Cat M1/ NB2 module with ultra-low power consumption
- ✓ SRD* (Short Range Device) radio with mesh capabilities
- ✓ Integrated RAM and flash
- ✓ Super slim profile in LGA package
- ✓ Supports integrated SIM (iSIM*)
- ✓ Embedded with abundant Internet service protocols
- ✓ Supports DFOTA
- ✓ A rich set of external interfaces (including RF control interfaces) that ensure convenient applications
- ✓ Fast time-to-market: reference designs, evaluation tools and timely technical support minimizing time and efforts in design and development
- ✓ Robust mounting and interfaces



LTE Cat M1 &
Cat NB2



LGA Package



iSIM



Abundant Protocols
Embedded



DFOTA



Compact Size



Ultra-low Power
Consumption



Quectel Enhanced
AT Commands



Integrated RAM and
Flash

Quectel BG950S-GL

LTE Cat M1/ NB2		BG950S-GL	
Region/ Operator		Global	
Dimensions (mm)		23.6 × 19.9 × 2.2	
Package		LGA	
Weight (g)		Approx. 2.31	
Temperature Range			
Normal Operating Temperature		-35 °C to +75 °C	
Extended Operating Temperature		-40 °C to +85 °C	
Frequency Bands			
LTE-FDD		Cat M1: B1/ 2/ 3/ 4/ 5/ 8/ 12/ 13/ 18/ 19/ 20/ 25/ 26/ 27/ 28/ 66/ 85 Cat NB2: B1/ 2/ 3/ 4/ 5/ 8/ 12/ 13/ 17/ 18/ 19/ 20/ 25/ 26/ 28/ 66/ 85	
Data Rate (Max.)			
LTE (kbps)	Rel-14	Cat M1: 588 (DL)/ 1119 (UL) Cat NB1/NB2: 127 (DL)/ 158 (UL)	
Certifications			
Carrier		Europe: Vodafone*/ Deutsche Telekom* America: AT&T/ T-Mobile/ Verizon* Canada: Rogers*/ Telus* South Korea: KT*/ LGU+* Japan: NTT DOCOMO*/ KDDI* Australia: Telstra*	
Regulatory/ Conformance		Global: GCF Europe: CE North America: PTCRB America: FCC Canada: IC South Korea: KC* Japan: JATE/ TELEC Australia/New Zealand: RCM	
Others		RoHS	
Interfaces			
UART		× 2	
ADC		× 2	
USIM		× 1 (Supports 1.8 V only)	
GPIO		× 9	
GRFC		× 2	
NET_STATUS		× 1 (Indicates the module's network activity status)	
STATUS		× 1 (Indicates the module's operation status)	
Antenna		× 2 (Main Antenna: × 1; GNSS Antenna: × 1)	
SMS			
Short Message Service		Point-to-Point MO and MT SMS cell broadcast Text and PDU mode SMS storage: ME by default	
Enhanced Features			
GNSS		GPS/ GLONASS*	
DFOTA		●	
QuecOpen®		-	
iSIM*		●	
SRD*		●	
Software Features			
3GPP		3GPP E-UTRA Release 14 3GPP TS 27.007 3GPP TS 27.005 Quectel Enhanced AT Commands	
AT Commands			
Protocols		TCP/ PPP/ UDP/ SSL/ MQTT/ FTP(S)/ HTTP(S)/ LwM2M*/ IPv4/ IPv6/ TLS/ DTLS/ PING/ CoAP/ NITZ	
Firmware Upgrade		UART/ DFOTA	
Electrical Features			
Output Power (Max.)		23 dBm ±2 dB	
Supply Voltage Range		VBAT_BB/ VBAT_RF: 2.2–4.35 V, typ. 3.3 V	
Power Consumption (Typical)		Power Saving Mode: 1.44 µA @ Cat M1 1.53 µA @ Cat NB1 Rock Bottom: 4.93 µA @ AT+CFUN=0, AT+QSClk=2 1.97 µA @ AT+CFUN=0, AT+QSClk=3 Idle Mode: Cat M1 9.55 mA @ DRX = 1.28 s 9.31 mA @ e-I-DRX = 81.92 s; PTW = 2.56 s; DRX = 1.28 s Cat NB1: 9.73 mA @ DRX = 1.28 s 9.66 mA @ e-I-DRX = 81.92 s; PTW = 2.56 s; DRX = 1.28 s	
		Sleep Mode @ AT+QSClk=2: Cat M1: 0.39 mA @ DRX = 1.28 s 18.27 µA @ e-I-DRX = 40.96 s; PTW = 1.28 s; DRX = 1.28 s 9.32 µA @ e-I-DRX = 81.92 s; PTW = 1.28 s; DRX = 1.28 s Cat NB1: 0.62 mA @ DRX = 1.28 s 41.01 µA @ e-I-DRX = 40.96 s; PTW = 2.56 s; DRX = 1.28 s 22.89 µA @ e-I-DRX = 81.92 s; PTW = 2.56 s; DRX = 1.28 s Sleep Mode @ AT+QSClk=3: Cat M1: 0.38 mA @ DRX = 1.28 s 15.67 µA @ e-I-DRX = 40.96 s; PTW = 1.28 s; DRX = 1.28 s 8.71 µA @ e-I-DRX = 81.92 s; PTW = 1.28 s; DRX = 1.28 s Cat NB1: 0.62 mA @ DRX = 1.28 s 35.38 µA @ e-I-DRX = 40.96 s; PTW = 2.56 s; DRX = 1.28 s 17.82 µA @ e-I-DRX = 81.92 s; PTW = 2.56 s; DRX = 1.28 s	
		Active Mode (GNSS disabled): Cat M1: 205 mA @ 23 dBm Cat NB1: 218 mA @ 23 dBm	

Note:

*: Under development/ planning/ in progress.

●: Supported.

- : Not supported.