


Quectel SC668S Series

Multi-mode Smart LTE Module with Wi-Fi & Bluetooth

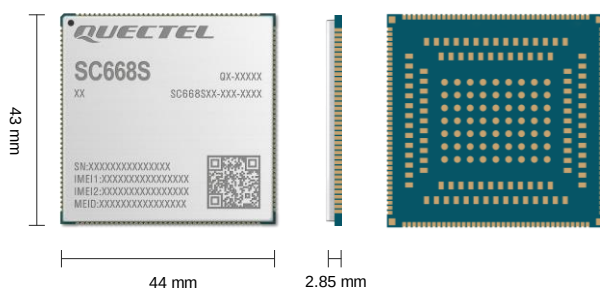

SC668S is a series of multi-mode Smart LTE Cat 4 modules with built-in Android 10/ 11/ 13/ 15 OS. Based on QCM6125 high-performance 64-bit octa-core processors with built-in Adreno™ 610 GPU, it is an ideal solution for a wide range of industrial and consumer applications requiring high data rates and multimedia functions. SC668S series comes in five variants: SC668S-CN, SC668S-EM, SC668S-NA, SC668S-JP and SC668S-WF (only supports Wi-Fi and Bluetooth).

SC668S series supports multiple-input multiple-output (MIMO) technology. The concurrent use of multiple antennas at the receiver end on the same frequency band greatly minimizes bit error rate and optimizes the data speed, thereby improving communication quality. The module also supports multi-constellation GNSS (GPS, GLONASS, BDS, Galileo, QZSS and SBAS) receiver for fast and accurate positioning.

A rich set of interfaces (such as LCM, camera, touch panel, UART, USB, I2C, I2S and SPI) are integrated to extend the applicability of the module to a wide range of M2M applications, including smart cash registers, smart POS, smart safety, on-board equipment, high-end information acquisition equipment, smart robots, smart home, smart hardware, industrial smart handheld equipment, audio and video recorders, smart interphones, smart wearables, vending machines, logistics cabinets, etc.



Key Features

- ✓ Exceptional system performance based on Qualcomm 64-bit octa-core ARM Kryo™ 260 processors
- ✓ Built-in Qualcomm high-performance Adreno™ 610 graphics engine
- ✓ Worldwide LTE, UMTS/ HSPA+ and GSM/ GPRS/ EDGE coverage
- ✓ MIPI DSI (resolution of up to 1920 × 1200 @ 60 fps or 1080 × 2520 @ 60 fps)
- ✓ Up to 6 cameras, 2 of which can work concurrently
- ✓ Multi-constellation GNSS receiver available for applications requiring fast and accurate fixes in any environment
- ✓ Recording and playback of 4K videos @ 30 fps



ARM Kryo™ 260 64-bit processor (octa-core)



Qualcomm Adreno™ 610 GPU



Android



LTE Cat 4
Max. 150 Mbps (DL)
Max. 50 Mbps (UL)



IEEE 802.11
a/ b/ g/ n/ ac



Bluetooth 5.0
(BR/ EDR + BLE)



GPS/ GLONASS/
BDS/ Galileo/ QZSS/
SBAS



Powerful Multimedia
Function



LCC + LGA
Package

Quectel SC668S Series

LTE Cat 4	SC668S-CN	SC668S-EM	SC668S-JP	SC668S-NA	SC668S-WF
Region/ Operator	China/ India	Europe/ India/ Korea/ South Asia/ Latin America/ Australia/ South Africa	Japan	North America	Global
CPU	QCM6125 4 × A73 @ 2.0 GHz 4 × A53 @ 1.8 GHz	QCM6125 4 × A73 @ 2.0 GHz 4 × A53 @ 1.8 GHz	QCM6125 4 × A73 @ 2.0 GHz 4 × A53 @ 1.8 GHz	QCM6125 4 × A73 @ 2.0 GHz 4 × A53 @ 1.8 GHz	QCM6125 4 × A73 @ 2.0 GHz 4 × A53 @ 1.8 GHz
NPU	1.1 TOPS	1.1 TOPS	1.1 TOPS	1.1 TOPS	1.1 TOPS
Memory	4 GB + 64 GB (LPDDR4X uMCP, default) 3 GB + 32 GB (LPDDR4X eMCP, optional)	4 GB + 64 GB (LPDDR4X uMCP, default) 3 GB + 32 GB (LPDDR4X eMCP, optional)	4 GB + 64 GB (LPDDR4X uMCP, default) 3 GB + 32 GB (LPDDR4X eMCP, optional)	4 GB + 64 GB (LPDDR4X uMCP, default) 3 GB + 32 GB (LPDDR4X eMCP, optional)	4 GB + 64 GB (LPDDR4X uMCP, default) 3 GB + 32 GB (LPDDR4X eMCP, optional)
OS	Android 10/ 11/ 13/ 15	Android 10/ 11/ 13/ 15	Android 10/ 11/ 13/ 15	Android 10/ 11/ 13/ 15	Android 10/ 11/ 13/ 15
Dimensions (mm)	43 × 44 × 2.85	43 × 44 × 2.85	43 × 44 × 2.85	43 × 44 × 2.85	43 × 44 × 2.85
Package	LCC + LGA	LCC + LGA	LCC + LGA	LCC + LGA	LCC + LGA
Weight (g)	Approx. 12	Approx. 12	Approx. 12	Approx. 12	Approx. 12
Temperature Range					
Operating Temperature	-35 °C to +75 °C	-35 °C to +75 °C	-35 °C to +75 °C	-35 °C to +75 °C	-35 °C to +75 °C
Frequency Bands					
LTE-FDD	B1/ 3/ 5/ 8	B1/ 2/ 3/ 4/ 5/ 7/ 8/ 20/ 28	B1/ 3/ 5/ 8/ 11/ 18/ 19/ 21/ 26/ 28	B2/ 4/ 5/ 7/ 12/ 13/ 14/ 17/ 25/ 26/ 66/ 71	-
LTE-TDD	B34/ 38/ 39/ 40/ 41 (200 MHz)	B38/ 39/ 40/ 41 (200 MHz)	B41	B41 (200 MHz)	-
WCDMA	B1/ 8	B1/ 2/ 4/ 5/ 8	B1/ 6/ 8/ 19	-	-
EVDO/ CDMA	BC0	-	-	-	-
GSM (MHz)	900/ 1800	850/ 900/ 1800/ 1900	-	-	-
WLAN	2.4/ 5 GHz, 802.11a/ b/ g/ n/ ac	2.4/ 5 GHz, 802.11a/ b/ g/ n/ ac	2.4/ 5 GHz, 802.11a/ b/ g/ n/ ac	2.4/ 5 GHz, 802.11a/ b/ g/ n/ ac	2.4/ 5 GHz, 802.11a/ b/ g/ n/ ac
Bluetooth	Bluetooth 2.1 + EDR/ 3.0/ 4.1 LE/ 4.2 BLE/ 5.0 LE	Bluetooth 2.1 + EDR/ 3.0/ 4.1 LE/ 4.2 BLE/ 5.0 LE	Bluetooth 2.1 + EDR/ 3.0/ 4.1 LE/ 4.2 BLE/ 5.0 LE	Bluetooth 2.1 + EDR/ 3.0/ 4.1 LE/ 4.2 BLE/ 5.0 LE	Bluetooth 2.1 + EDR/ 3.0/ 4.1 LE/ 4.2 BLE/ 5.0 LE
GNSS	GPS/ GLONASS/ BDS/ Galileo/ QZSS/ SBAS	GPS/ GLONASS/ BDS/ Galileo/ QZSS/ SBAS	GPS/ GLONASS/ BDS/ Galileo/ QZSS/ SBAS	GPS/ GLONASS/ BDS/ Galileo/ QZSS/ SBAS	-
Certifications					
Carrier	-	-	NTT DOCOMO	Verizon/ AT&T	-
Regulatory	China: SRRC/ NAL/ CCC	Global: GCF Europe: CE The UK: UKCA Australia/ New Zealand: RCM South Korea: KC	Japan: TELEC/ JATE	Global: GCF North America: PTCRB America: FCC Canada: IC	Europe: CE America: FCC The UK: UKCA Canada: IC Australia/ New Zealand: RCM
Others	RoHS/ REACH	RoHS/ REACH	RoHS/ REACH	RoHS/ REACH	RoHS/ REACH
Data Rates					
LTE-FDD (Mbps)	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)	-
LTE-TDD (Mbps)	130 (DL)/ 30 (UL)	130 (DL)/ 30 (UL)	130 (DL)/ 30 (UL)	130 (DL)/ 30 (UL)	-
DC-HSPA+ (Mbps)	42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)	-	-	-
WCDMA (kbps)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)	-	-
EVDO (Mbps)	3.1 (DL)/ 1.8 (UL)	-	-	-	-
1X Advanced (kbps)	307.2 (DL)/ 307.2 (UL)	-	-	-	-
EDGE (kbps)	296 (DL)/ 236.8 (UL)	296 (DL)/ 236.8 (UL)	-	-	-
GPRS (kbps)	107 (DL)/ 85.6 (UL)	107 (DL)/ 85.6 (UL)	-	-	-
Enhanced Features					
3GPP E-UTRA	Release 12	Release 12	Release 12	Release 12	-
Bandwidth (MHz)	1.4/ 3/ 5/ 10/ 15/ 20	1.4/ 3/ 5/ 10/ 15/ 20	1.4/ 3/ 5/ 10/ 15/ 20	1.4/ 3/ 5/ 10/ 15/ 20	-
Rx-diversity	●	●	●	●	-
DL MIMO 2 × 2	●	●	●	●	-
(U)SIM Card Detection	●	●	●	●	-
DSDS	●	●	●	●	-
Firmware Upgrade via USB	●	●	●	●	●
Firmware Upgrade via OTA	●	●	●	●	●

Note:
●: supported

Quectel SC668S Series

LTE Cat 4 General Features	
Interfaces	
LCM	One 4-lane MIPI DSI, up to (1920 × 1200) @ 60 fps or (1080 × 2520) @ 60 fps
Camera	Three 4-lane MIPI CSI, up to 2.1 Gbps/ lane Each 4-lane can be divided into (2-lane + 1-lane), up to 6 cameras, 2 of which can work concurrently Dual-ISP, up to (16 MP + 16 MP) or up to 24 MP
Touch Panel	Capacitive touch panel
Audio	Analog channels: 3 inputs: MIC1, MIC2 and MIC3 (including 1 noise-canceling MIC) 3 outputs: Line Out, earpiece and headphone
Video	Encoding: 4K @ 30 fps; HEVC/ H.264/ VP8 Decoding: 4K @ 30 fps; HEVC/ H.264/ VP8/ VP9; 1080P @ 30 fps, MPEG-2
USB	× 1, USB 3.1 Type-C interface, compatible with USB 2.0
DP	× 1, up to 1920 × 1200 @ 60 fps, currently DP is only compatible with USB 2.0
(U)SIM	× 2, 1.8/ 2.95 V (U)SIM cards; (U)SIM card hot swap detection and dual-SIM dual-standby
SD Card	× 1, SD 3.0, 4-bit SDIO
ADC	× 2, general-purpose ADC interface
UART	× 3 Debug UART: 2-wire serial port, only for debugging UART03: 2-wire serial port UART00: 4-wire serial port, RTS and CTS hardware flow control with up to 4 Mbps data rate
I2C	× 2
SPI	× 2
I2S	× 1
PWRKEY	1.1 V, internally pulled up
GPIO	× 20
Antenna	× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth antennas respectively (SC668S-WF: × 1, Wi-Fi & Bluetooth antenna)
Electrical Features	
Supply Voltage Range	3.55–4.4 V, typ. 3.8 V
Power Consumption (Typical)	100 μA @ power off; 5.5 mA @ sleep mode